


DIRECT FIRED MODULE

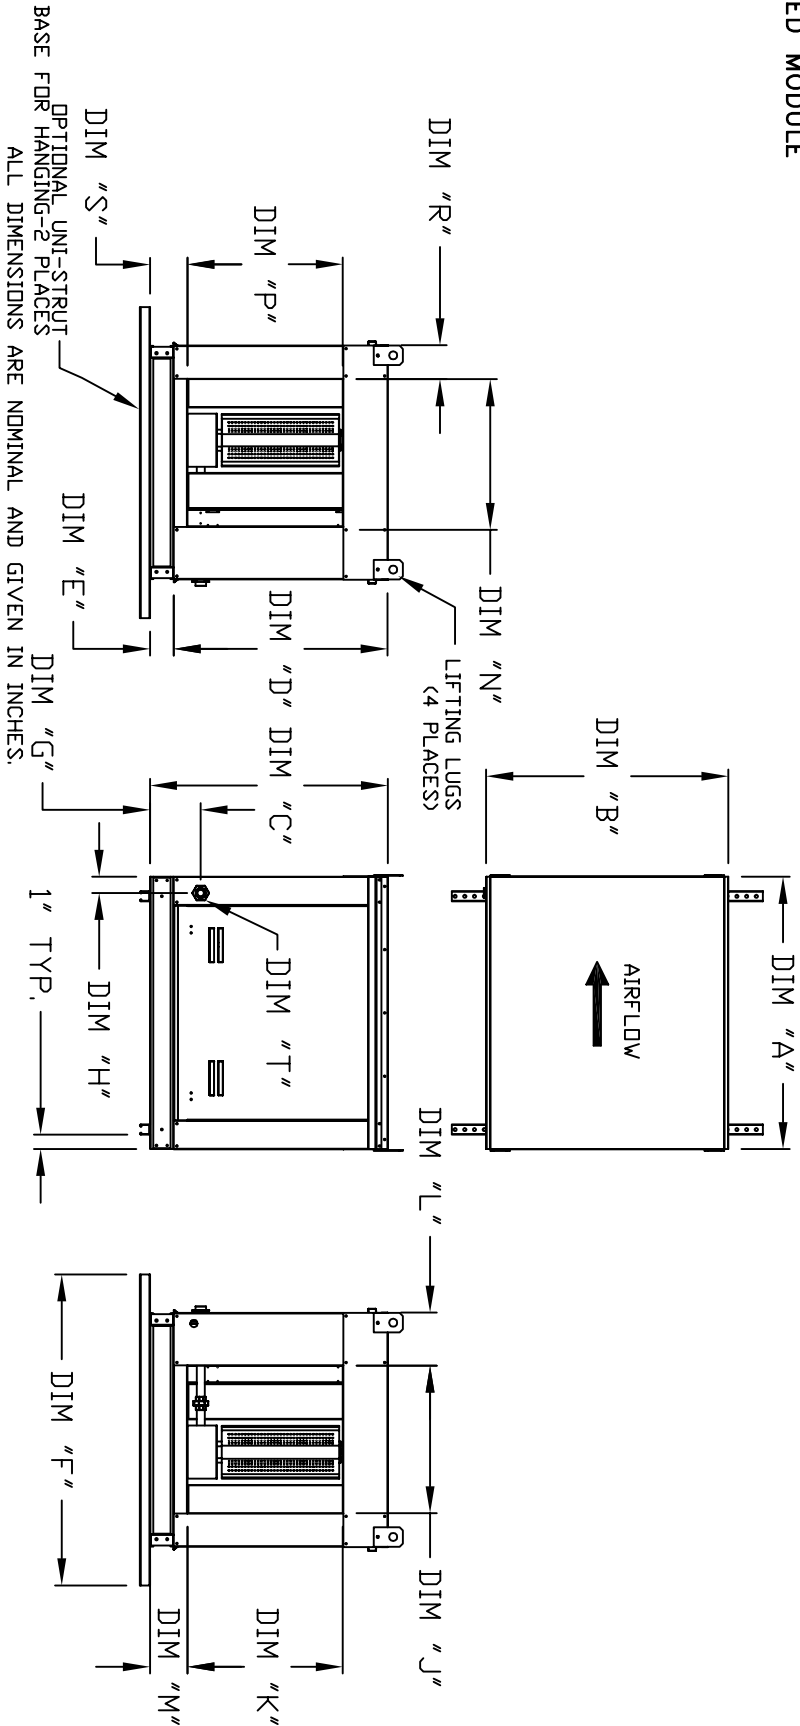

MODEL	WEIGHT	UNIT DIMENSIONS													INTAKE OPENING		DISCHARGE OPENING	
		A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	
D1.250	345 LBS	42-1/8	27-3/8	29-3/4	26-1/16	3-3/4	36	7-13/16	2-9/16	16	18	8-1/8	5-3/4	16	18	1-15/16	5-3/4	
D1.500	350 LBS	42-1/8	27-3/8	29-3/4	26-1/16	3-3/4	36	7-13/16	2-9/16	16	18	8-1/8	5-3/4	16	18	1-15/16	5-3/4	
D2.500	420 LBS	42-1/8	37-3/8	36-3/4	33-1/16	3-3/4	48	7-13/16	2-9/16	22-3/4	24	8-1/8	5-3/4	22-3/4	24	5-3/16	5-3/4	
D2.750	425 LBS	42-1/8	37-3/8	36-3/4	33-1/16	3-3/4	48	7-13/16	2-9/16	22-3/4	24	8-1/8	5-3/4	22-3/4	24	5-3/16	5-3/4	
D3.750	450 LBS	42-1/8	41-3/8	43-3/8	38-1/16	5-1/4	48	9-1/2	2-9/16	30	30	8-1/8	7-1/2	30	30	1-15/16	7-1/2	
D3.1000	455 LBS	42-1/8	41-3/8	43-3/8	38-1/16	5-1/4	60	9-1/2	2-9/16	30	30	8-1/8	7-1/2	30	30	1-15/16	7-1/2	
D4.1000	690 LBS	54-3/16	48-7/16	51-3/8	46-1/8	5-1/4	60	13-9/16	2	34	36	10-3/16	7-1/2	34	36	2-15/16	7-1/2	
D4.1500	705 LBS	54-3/16	48-7/16	51-3/8	46-1/8	5-1/4	60	13-9/16	2	34	36	10-3/16	7-1/2	34	36	2-15/16	7-1/2	
D5.2000	830 LBS	54-3/16	59-3/16	58-3/8	53-1/8	5-1/4	72	13-3/4	2-1/8	43	43	10-3/16	7-1/2	43	43	4-11/16	7-1/2	
D5.2500	845 LBS	54-3/16	59-3/16	58-3/8	53-1/8	5-1/4	72	13-3/4	2-1/8	43	43	10-3/16	7-1/2	43	43	4-11/16	7-1/2	

UNIT INFORMATION:

MODEL	BURNER LENGTH	BTU RANGE (MBH)	GAS PRESSURE		GAS CONNECTION	CFM RANGE	
			MIN	MAX		MIN	MAX
D1.250	6'	18	7" WC	14" WC	3/4	1000	3000
D1.500	12'	18	7" WC	14" WC	3/4	1000	3000
D2.500	12'	18	7" WC	14" WC	1	2500	6000
D2.750	18'	27.5	7" WC	14" WC	1	2500	6000
D3.750	18'	27.5	7" WC	14" WC	1	3500	8000
D3.1000	24'	36.6	7" WC	14" WC	1	3500	8000
D4.1000	24'	36.6	7" WC	5 PSI	1-1/4	6000	13000
D4.1500	30'	45.8	7" WC	5 PSI	1-1/4	6000	13000
D5.2000	48'	73.3	7" WC	5 PSI	1-1/2	10000	21000
D5.2500	48'	91.4	7" WC	5 PSI	1-1/2	10000	21000