MODULAR OUTDOOR IBT HEATER WITH COOLING COIL, MIXING BOX, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD

IHVBLPDECMBCCSAHIBT-MPU-15
REV.#1 07/25/2012

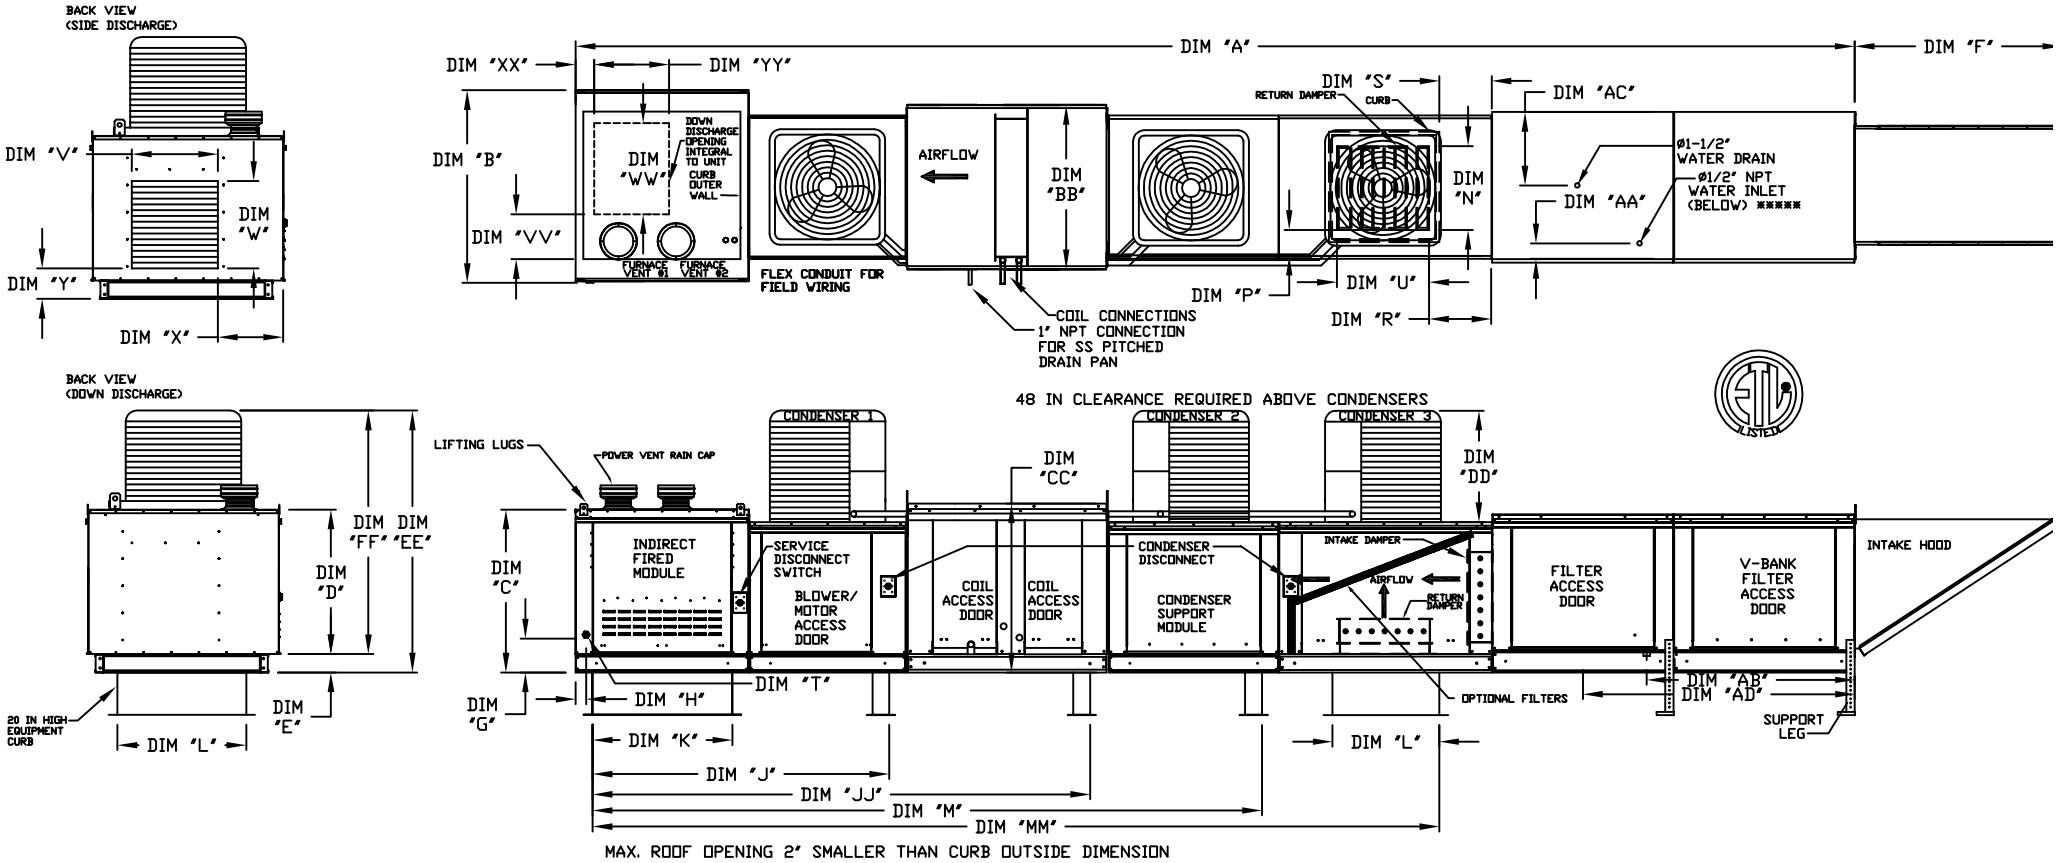

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS																MIXING BOX OPENING					SIDE DISCHARGE OPENING				DOWN DISCHARGE OPENING				GAS CONNECTION	# OF FURNACES	WATER INLET		DRAIN OPENING	
	A	B	BB	C	CC	D	E	F	G	H	J	K	L	JJ	M	MM	N	P	R	S	U	V	W	X	Y	VV	WW	XX	YY	"T" (NPT)		AA	AB	AC	AD
3-IBT.400-G18	302-3/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	76-3/8	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	1	4-1/2	41-1/8	23-1/2	52-7/8
3-IBT.600-300-300-G18	302-3/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	76-3/8	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	41-1/8	23-1/2	52-7/8
3-IBT.800-400-400-G18	302-3/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	76-3/8	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	41-1/8	23-1/2	52-7/8
4-IBT.400-920	358	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	71-3/8	10-3/4	2-11/16	121-1/4	42	42	175-9/16	229-7/8	277-9/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	1	4-1/2	41-1/8	28-7/8	52-7/8
4-IBT.800-400-400-920	358	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	71-3/8	10-3/4	2-11/16	121-1/4	42	42	175-9/16	229-7/8	277-9/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	2	4-1/2	41-1/8	28-7/8	52-7/8

UNIT INFORMATION

MODEL	BTU RANGE (MBH)**			TURNDOWN	COMBUSTION	GAS PRESSURE****	
	BURNER INPUT	BTU LOW	BTU HIGH	RATIO	EFFICIENCY***	MIN	MAX
3-IBT.400-G18	400	53.3	320	6	80.0%	7" WC	14" WC
3-IBT.600-300-300-G18	600	40	480	12	80.0%	7" WC	14" WC
3-IBT.800-400-400-G18	800	53.3	640	12	80.0%	7" WC	14" WC
4-IBT.400-920	400	53.3	320	6	80.0%	7" WC	14" WC
4-IBT.800-400-400-920	800	53.3	640	12	80.0%	7" WC	14" WC

CELDEK EVAPORATIVE COOLING UNIT			
TOT. WEIGHT	MEDIA SIZE & QTY	NOZZLES	MAX. FLOW RATE
3187 LBS	38"x43"x12"	35	10.15 GPH
3305 LBS	38"x43"x12"	35	10.15 GPH
3443 LBS	38"x43"x12"	35	10.15 GPH
4154 LBS	45"x54"x12"	42	12.6 GPH
5037 LBS	45"x54"x12"	42	12.6 GPH

V-BANK INFORMATION
FILTER SIZE & QTY
16"x20"x2" (15)
16"x20"x2" (15)
16"x20"x2" (15)
20"x25"x2" (12)
20"x25"x2" (12)

: ADD CONDENSING UNIT WEIGHT
'O WEIGHT IN TABLE ABOVE

** ALL MODELS ARE FULLY
ELECTRONICALLY MODULATING

*** COMBUSTION EFFICIENCY
IF EVERY UNIT IS 80.0% OVER
'HE ENTIRE GAS FIRING RANGE.

**** GAS PRESSURES IN TABLE ARE
'OR NATURAL GAS, LP MINIMUM GAS
NLET PRESSURE = 11" W.C.

***** MAX. EVAP WATER PRESSURE

CONDENSER INFORMATION							
MODEL	WEIGHT*	TONNAGE			DD	EE	FF
		#1	#2	#3			
15 TON-G18	570 LBS	5 TON	5 TON	5 TON	26-1/2	69-7/8	64-9/16
15 TON-920	570 LBS	5 TON	5 TON	5 TON	26-1/2	90-7/8	85-5/8

R410A REFRIGERANT

OPTIONAL MIXING BOX FILTERS	
MODEL	FILTER SIZE & QTY
G18	15"x20"x2" (4), 15"x15"x2" (2)
920	18"x25"x2" (4), 16"x20"x2" (2)